




Surface area & pore size analyzers

Nova.

Experience
velocity.

NEXT GENERATION



SPECIFIC SURFACE AREA AND PORE CHARACTERISTICS GREATLY INFLUENCE A MATERIAL'S SUITABILITY AND PERFORMANCE IN REAL-WORLD APPLICATIONS.

For far too long, analysts have had to make a choice between speed of analysis and precision. Not anymore.

With Nova, speed of analysis and precision are no longer an either-or choice.

Experience velocity the Nova way: speed vectored at precision.

- 5-Point BET analysis on 4 samples in as little as 20 minutes with <2 % reproducibility
- 4 x 40 point mesopore runs in under 8 hours
- Simultaneous degassing of 4 samples during analysis

COMPLETELY REDESIGNED FROM THE INSIDE OUT, THE NOVA SERIES SETS THE NEW BENCHMARK IN SURFACE AREA AND PORE CHARACTERIZATION.

Behind the familiar touchscreen lies a new, more robust design, which includes a vacuum brazed manifold and stainless steel tubing throughout. Combined with the new valves and electronic components, this enhances the vacuum and measurement performance.

THE NOVA TRULY REPRESENTS THE NEXT GENERATION OF SURFACE AREA AND PORE ANALYZERS.

**NEXT GENERATION.
FAMILIAR YET NEW.**

**OPERATIONAL SIMPLICITY.
FROM START TO FINISH.**

**VELOCITY. SPEED AND PRECISION.
HAVE BOTH.**

**ADAPTABILITY. PERFORM TODAY.
PREPARE FOR TOMORROW:**



FIND OUT MORE




www.anton-paar.com/nova

Simplicity.

From start to finish.

OPERATIONAL
SIMPLICITY



DEGAS YOUR SAMPLES

4 integrated degassing stations and configurable software-controlled heating routines enable simple, “select and go” sample preparation while ensuring full traceability of sample preparation.



CHOOSE YOUR METHOD

Take the guesswork out of conformance to recognized standards (such as ASTM, ISO, and USP) by utilizing Nova’s extensive library of pre-programmed analysis profiles, or rely on intelligent dosing algorithms to create your own custom analysis profiles.



ANALYZE WITH VELOCITY

See the status of your analysis at a glance with the updated, high-definition 10-inch graphical touchscreen, which broadcasts progress step by step in real time. The integrated touchscreen lets you easily access displays of the full isotherm, the BET plot, and the calculated surface area.



REPORT WITH EASE

Avoid complicated data processing – go from result to report in no time. For more detailed reporting, tap into Nova’s rich library of report templates and extensive data reduction capabilities.

✓ Vacuum and flow degassing capabilities at temperatures up to 425 °C

✓ 20 pre-configured, analysis methods (ASTM, ISO, USP) and reporting templates for a wide range of sample types

✓ PowderProtect: Intelligent sample cell evacuation reduces risk of fine powder elutriation during degassing and analysis

✓ Service dashboard tracks instrument and key component usage enabling predictive maintenance

✓ Eliminate the clutter, cost, and complexity of external degassing devices

✓ Intelligent dosing algorithms simplify creation of analysis profiles

✓ 4 instruments can be controlled remotely from a single computer using Kaomi for Nova PC software

✓ Backed by a 3-year warranty and extensive Anton Paar global network

Speed and precision. Have both.

MAXIMIZE YOUR THROUGHPUT

Analyze 4 samples for 5-point BET surface area analysis in as little as 20 minutes and 4 complete isotherms in under 8 hours.

THE POWER OF 4 + 4

The Nova 800 is equipped with 4 degas and 4 analysis stations that operate at the same time. Analyze up to 4 samples while simultaneously preparing the next batch of 4 samples – efficiency, the Nova way.

SPEED UP WITH NOVA MODE


Reduce analysis time significantly using NOVA mode. This patented feature saves time at the start of every analysis by using stored sample cell void volumes instead of void volume measurement. In addition, NOVA mode enables helium-free operation.

OPTIMIZE ANALYSES WITH DOSING ALGORITHMS

Take advantage of Nova's unique DoseWizard and VectorDose intelligent dosing algorithms to increase the velocity of your measurements.



VELOCITY



BEST-IN-CLASS PRECISION

Even with an absolute surface area as low as 2 m² in the cell, obtain reproducibility better than 2 %.

TRUZONE – ACTIVE COOLANT LEVEL CONTROL

Increase analysis sensitivity with the exclusive TruZone active coolant level system. This unique feature constantly maintains the cryogen level to encompass only the portion of the cell containing the sample. The smaller “cold zone” minimizes non-adsorbed gas molecules in the void space of the sample cell, allowing the instrument to more easily detect those molecules that are adsorbed.

EXCEPTIONAL PRESSURE MEASUREMENT ACCURACY

Nova uses high accuracy transducers combined with state-of-the-art electronics and vacuum systems to deliver exceptional pressure measurement accuracy of better than 0.1 % (of full scale).


DEDICATED P₀ CELL AND TRANSDUCER

Each Nova instrument incorporates a dedicated P₀ cell and transducer, eliminating the need to allocate an analysis station to measure the P₀. The instrument can constantly monitor the saturation pressure over the course of a measurement to provide more accurate relative pressure readings, yielding precise and reproducible isotherms.


Perform today.

Prepare for tomorrow.

ADAPTABILITY



	RESULTS	ANALYSIS STATIONS	DEGAS STATIONS	DESIGN FEATURES
	∨	∨	∨	∨
Nova 600 BET	Surface area (BET, NSA, STSA, and Langmuir)	2	4	<ul style="list-style-type: none"> - Hardware optimized for rapid analyses - Software further simplified by removing pore size data collection and reduction options
Nova 800 BET	Surface area (BET, NSA, STSA, and Langmuir)	4	4	<ul style="list-style-type: none"> - Same analysis capabilities as the Nova 600 - Highest sample throughput
Nova 600	Surface area (BET, NSA, STSA, and Langmuir) Pore Size (BJH, DFT) Pore Volume	2	4	<ul style="list-style-type: none"> - Traditional long cells and large 2L dewar allow for detailed pore size analyses - Flexible software and advanced data reduction models for both basic and comprehensive analyses - Moderate sample throughput
Nova 800	Surface area (BET, NSA, STSA, and Langmuir) Pore Size (BJH, DFT) Pore Volume	4	4	<ul style="list-style-type: none"> - Same analysis capabilities as the Nova 600 - Highest sample throughput

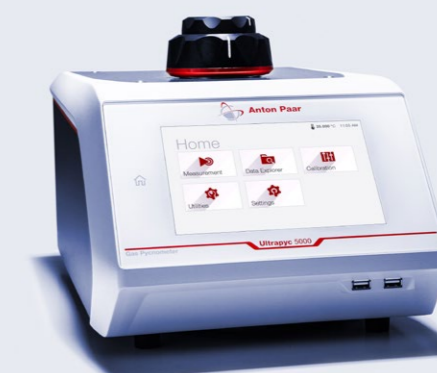

↑ **SATISFY YOUR ANALYSIS DEMANDS NOW AND IN THE FUTURE**

Whether used for quality control or research, in industry or by academics, for quick BET analysis or comprehensive isotherms, there's a Nova model fit for your needs – and ready for tomorrow.

↑ **CONSERVE HELIUM**

The patented NOVA mode – a unique, sustainable analysis method to determine the sample cell's void volume – eliminates the need to use this scarce, non-renewable resource.

↑ **NOVA EVOLVES WITH YOU**

Upgrade your Nova's materials characterization capabilities if your needs change. The Anton Paar global support network makes it simple to go from BET-only to more in-depth exploration capabilities for pore size and volume.

↑ **MICRO AND MESOPORE SIZE DISTRIBUTION FOR CARBON-BASED MATERIALS**

The recirculating dewar kit, combined with a recirculating bath, extends the analysis temperature range from -20 °C to 150 °C. This kit allows for CO₂ adsorption studies at 0 °C, which provides a full micropore characterization for carbonaceous materials at a fraction of the cost of a dedicated micropore analyzer.

↑ **ULTRAPYC GAS PYCNOMETERS**

Ultrapyc gas pycnometers measure the true and skeletal density of solids. Further enhance the characterization of your samples by obtaining true density values.

Kaomi for Nova. Seamless software.

THE ALL-IN-ONE PACKAGE

Kaomi for Nova is a powerful, multi-faceted software that combines instrument control and data processing capabilities and is ideal for both QC and R&D. The intuitive software works in concert with the touchscreen interface, letting you set up and perform analyses, as well as easily process, report, and store experimental data.



WITH THIS VERSATILE SOFTWARE, YOU CAN:

- ✓ Connect to and control up to 4 Nova instruments
- ✓ Develop, save, and reuse degas and analysis profiles customized to your materials and processes
- ✓ Check the status of the connected instruments and see analyses progress in real time
- ✓ Display program information in any of 6 languages
- ✓ Set up reports with tabular or graphical data or both – print, save as .pdf, or export via common file formats such as .csv or .xlsx.
- ✓ Import legacy data files from any Quantachrome gas sorption instrument

STATE-OF-THE-ART FEATURES

PRE-LOADED, STANDARDIZED METHODS AND REPORTS

20+ included, consisting of ASTM, ISO, DIN, and USP standards, as well as methods specific for properties of interest.

MULTIPLE DOSING METHODS

Traditional targeted pressure ensures data points are collected as per user required definitions. VectorDose provides control over dose volumes to ensure resolution in pore filling regions (can be used in combination with traditional targeted pressure methods). DoseWizard delivers exceptional analysis speeds when similar samples are analyzed repeatedly.

COMPREHENSIVE PORE ANALYSIS

Ability to merge carbon dioxide and nitrogen pore size data for complete pore spectra on carbonaceous samples. Classical methods such as BJH, DH, MP & DA. Simulation methods based in density functional theory such as NLDFT & QSDFT.

MICROPOROUS BET ASSISTANT

Quickly and easily identifies and applies the appropriate relative pressure points for microporous samples based on IUPAC recommendations.

Versatility

across
industries.

1 CARBON

Various types of carbon, from carbon black to activated carbon and graphite, are increasingly used in batteries, catalysts, sorbents, rubber, and pigments. Carbons exhibit a wide range of surface areas and pores, which alter their behavior and suitability in diverse applications, and require monitoring to ensure optimal performance.

2 PHARMACEUTICALS

Analyzing surface area and pore size of all types of pharmaceutical powders – from active ingredients (APIs) to excipients – is imperative for quality and regulatory purposes and for development of new solid dose forms.

3 MINERALS

Processing of mined minerals, such as those used in manufacturing clay, requires multiple steps, each of which has an impact on the physical properties of the mineral. Monitoring surface area and pore size provides a rapid means to ensure product consistency.

4 CATALYSTS

Surface area and pore size impact quality and reaction efficiency in catalysts. Characterize these properties for raw materials (support or active materials) and finished product (heterogeneous or homogenous catalysts) in a variety of forms (powders, chunks, or small monoliths).

5 BATTERIES

Investigating the surface area of anode materials like graphite, cathodes such as lithium, and other metal oxides and separator membranes lets researchers and producers model, improve, and control the performance of raw material quality.

6 METAL POWDERS



Researchers and producers of metal powders – used in processes like additive manufacturing, batteries, and catalysts – rely on surface area analysis to predict and validate how the powder will behave in diverse applications.

7 METAL OXIDES

Industrial chemicals, such as alumina, titania, silica, and zirconia, are classified based on their physical characteristics, including surface area and pore size, because these properties have a major influence on the performance of the chemicals in different applications.

8 CERAMICS

Measuring surface area and pore characteristics of both the raw materials and the resulting ceramic material boosts product strength, texture, and appearance.

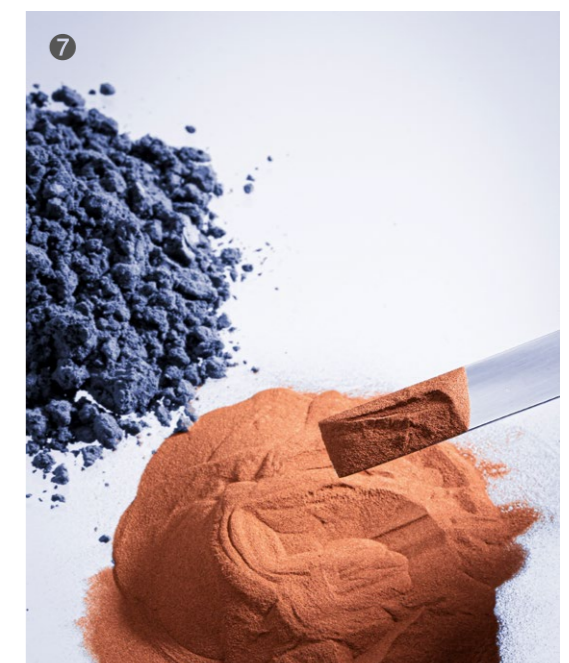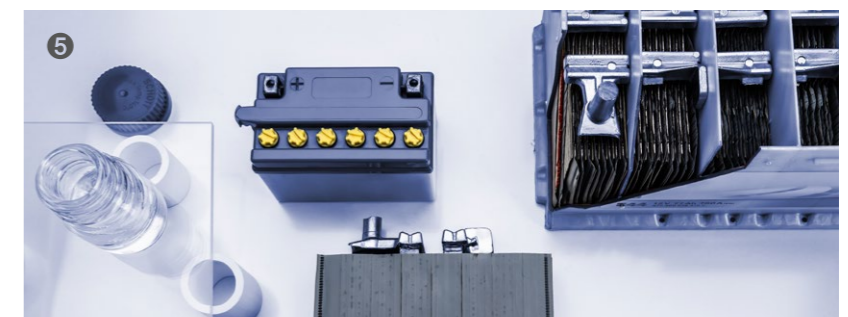



“

We're confident in the high quality of our instruments. That's why we provide **full warranty for three years.**

”

All new instruments* include repair for three years. You avoid unforeseen costs and can always rely on your instrument. Alongside the warranty we offer a wide range of additional services and maintenance options.

*Due to the technology they use, some instruments require maintenance according to a maintenance schedule. Complying with the maintenance schedule is a prerequisite for the three-year warranty.

Service and support directly from the manufacturer

Our comprehensive service provides you with the best individual coverage for your investment. You benefit from:



MAXIMUM UPTIME: Regardless of how intensively you use your instrument, we help you keep your device in good shape and safeguard your investment – including a three-year warranty.



THE SHORTEST RESPONSE TIME: We provide a response to your inquiry within 24 hours – from real people, not from bots.



CERTIFIED SERVICE ENGINEERS: The seamless and thorough training of our technical experts, as well as their certification, are carried out at our own facilities.



A GLOBAL SERVICE NETWORK: It spans 86 locations with a total of 350 certified service engineers. Wherever you're located, there is always an Anton Paar service engineer nearby.

Nova 600 BET Nova 800 BET Nova 600 Nova 800

ANALYSIS SPECIFICATIONS

	Nova 600 BET	Nova 800 BET	Nova 600	Nova 800
MEASUREMENT PRINCIPLE	Vacuum Volumetric			
ANALYSIS GASES	N ₂ only		N ₂ , Ar, CO ₂ , and other non-corrosive gases	
ANALYSIS STATIONS	2	4	2	4
INDEPENDENT P₀ STATION	Yes			
RELATIVE PRESSURE RANGE (P/P₀)	10 ⁻⁴ to 0.5		10 ⁻⁴ to 0.999	
PRESSURE MEASUREMENT ACCURACY	0.1 % (of full scale)*			
PRESSURE RESOLUTION	Absolute : 1.2 x 10 ⁻⁴ Torr Relative : 1.5 x 10 ⁻⁷ p/p ₀			
LOWER SPECIFIC SURFACE AREA LIMIT	From 0.01 m ² /g			
LOWER ABSOLUTE SURFACE AREA LIMIT	From 0.5 m ²			
SURFACE AREA REPRODUCIBILITY	2 %			
PORE SIZE RANGE	N/A		0.35 - 500 nm (Diameter) (0.35 - 1.1 nm only with CO ₂)	
MINIMUM PORE VOLUME	N/A		1.2 x 10 ⁻⁸ cm ³	
TRUZONE	Yes			
POWDERPROTECT	Yes			
DOSEWIZARDTM	Yes			
VECTORDOSE	Yes			
ANALYSIS DEWAR	Volume: 1 L Duration: up to 7 Hours		Volume: 2 L Duration: up to 40 Hours	
SAMPLE PREPARATION	Integrated Degassing Stations: 4 Temperature Control: 2 Heating Zones, Ambient to 425 °C Available Methods: Flow & Vacuum, Programable Multi-Step Heating Profiles			

PHYSICAL SPECIFICATIONS

DIMENSIONS (DxWxH)	44 cm x 63 cm x 84 cm
WEIGHT	63 kg
OPERATING ENVIRONMENT	Temperature: 15 to 35 °C Humidity: 20 to 80 % relative, non-condensing
WETTED PARTS	Stainless steel, Viton elastomers
GAS	Ports: 5 (3 Analysis, 1 Helium, 1 Degas/Backfill) Purity: 99.999 % (He, N ₂) Input Pressure: 8 to 10 PSIG
VACUUM CONNECTION	Rotary Pump Exhaust Port, KF 16
VACUUM REQUIREMENTS	Ultimate vacuum of 2.3x10 ⁻³ Torr
ELECTRICAL	Supply: AC 100-240 V AC , 50 / 60 Hz Consumption: 345 VA (Maximum)

ADDITIONAL SPECIFICATIONS

DISPLAY	10-inch touchscreen
PC CONNECTION	Ethernet
KAOMI FOR NOVA SOFTWARE	Instrument Control: up to 4 Instruments 6 Languages: English, French, German, Japanese, Chinese, Spanish
PRE-LOADED ANALYSIS PROFILES	20+ (ASTM, USP, DIN, ISO)
ROHS 3 COMPLIANT	Yes
CE CERTIFIED	Yes

* Includes precision, linearity and hysteresis of the complete pressure measurement system

All performance specifications in the document have been validated with the certificated reference material BAM P115 or BAM P102

